




# Power Solution

## PL80

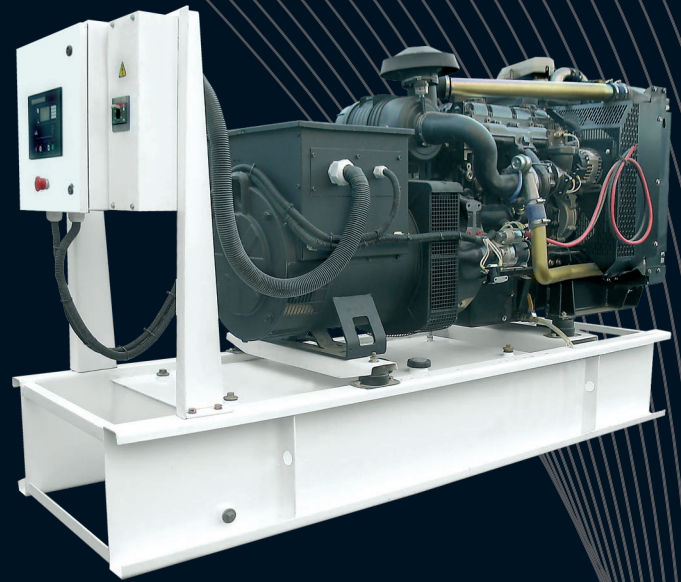

### OUTPUT RATINGS

Generating Set Model - PL80	Prime Power	Standby Power
<b>380 - 415V, 50 Hz / 1500 RPM</b>	80.0 KVA	88.0 KVA
operating Temp 40 C	64.0 Kw	70.4 Kw
<b>480 - 220 , 60 Hz / 1800 RPM</b>	91.3 KVA	100.3 KVA
Operating Temp 40 C	73.0 Kw	80.3 Kw

### RATINGS DEFINITIONS

**Prime Power :** Variable load Unlimited hours usage with an average load factory of 80% of the published prime power over each 24 hour period. A 10% overload is available for 1 hour in every 12 hours of operation.

**Standby power:** Variable load. Limited to 500 hours annual usage up to 300 hours of which may be continuous running. No overload is permitted.

### TECHNICAL DATA: ENGINE

Engine Model:	Perkins 1104A - 44TG2	
Number of Cylinders:	4 Vertical in-line	
Displacement:	4.4 liters	
Bore / Stroke: mm (in)	105 X 127 mm	
Compression ratio:	17.25:1	
Aspiration:	Turbo charger	
Cycle:	4 Stroke	
Combustion system	direct injection	
Total Coolant Capacity:	13.0 liters	
Total Lubrication System Capacity:	8.0 liters	
Rotation:	Anti Clockwise	
Cooling System:	Water - Cooled	
Engine Speed:	1500 RPM	1800 RPM
Gross Engine Power: Kw (hp)	73.4 (98.4)	89.8 (120.0)
Piston Speed: m/sec (ft/sec)	6.4 (20.8)	7.6 (25.0)
Fuel Tank Capacity: Liters (US Gal)	175 (46.2)	175 (46.2)
Fuel Consump, Prime PL80: 1/h (Usg / hr)	18.7 (4.95)	22.3 (5.89)
Fuel Consump, Standby PL88: 1/hr (Usg/hr)	20.5 (5.42)	24.4 (6.45)

### TECHNICAL DATA: ALTERNATOR

Alternator Model:	LEROY SOMER LSA - 43.2 L8	
Insulation glass:	H	
Winding pitch:	2/3 - (bob 6)	
Terminals:	12	
Drip proof:	IP23	
altitude:	≤ 1000 m	
Overspeed:	2250 min <sup>-1</sup>	
Air flow:	0.27 m <sup>3</sup> /s (50 Hz) 0.32 (60 Hz)	
Excitation system	SHUNT	AREP or PMG
A.V.R. Model:	R230	R438
Voltage regulation (*):	± 0.5%	± 0.5%
Sustained short-circuit current:	-	300% (3 IN):10s
Total harmonic TGH / THG (**)	at no load < 2% - on load < 2%	
Waveform:NEMA = TIF	< 50	< 50
Wave from: I.E.C = THF	< 2%	< 2%

**Note:** Derating may be required for conditions outside these; consult Perkins Engines Company Limited Generator powers are typical and are based on an average alternator efficiency and a power factor (Cos. φ) of 0.8

**Fuel specification:** BS 2869; part 2 1998 Class A2 or DIN EN 590

**Lubricating oil:** 15w40 To API Cg4.

### DIMENSIONS AND WEIGHTS

Length: mm (in)	Width: mm (in)	Height: mm (in)	Dry: Kg (lb)	Wet: Kg (lb)
2149 (84.6)	752 (29.6)	1366 (53.8)	990 (2183)	1010 (2227)

**Al-qaswaa group**  
for Power Generating & Heavy Equipment

Dubai, Al Murar, U.A.E.  
Tel: +971.4.2359499  
Fax: +971.4.2359799  
sales@alqaswaa.com  
www.alqaswaa.com